

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Kalle TAMMI et al.

Group Art Unit: Unassigned

Application No.: New Application

Examiner: Unassigned

Filed: February 12, 2004

Attorney Dkt. No.: 47092.00073

For: METHOD AND SYSTEM FOR DEACTIVATING A SERVICE ACCOUNT

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

February 12, 2004

Sir:

The benefit of the filing dates of the following prior foreign applications filed in the following foreign countries is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:

Patent Application No. 03007278.9 filed on March 31, 2003 in Europe

Patent Application No. 03027494.8 filed on December 1, 2003 in Europe


In support of this claim, certified copies of said original foreign applications are filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of these documents.

THIS PAGE BLANK (USPTO)

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,

A handwritten signature in black ink, appearing to read "William F. Nixon", is written over a horizontal line.

William F. Nixon
Registration No. 44,262

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

WFN:cct

Enclosure: Priority Documents (2)

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03027494.8

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 03027494.8
Demande no:

Anmeldetag:
Date of filing: 01.12.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Nokia Corporation
Keilalahdentie 4
02150 Espoo
FINLANDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Method and system for deactivating a service account

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

EP/31.03.03/EP 03007278

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04Q/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

THIS PAGE BLANK (USPTO)

Method and System for Deactivating a Service AccountFIELD OF THE INVENTION

The present invention relates to a method and system for deactivating a service account, e.g., a service account of an application server of a subscriber in an Internet Protocol Multimedia Subsystem (IMS).

BACKGROUND OF THE INVENTION

In order to achieve access independence and to maintain a smooth interoperation with wired terminals across the Internet, the IMS as specified e.g. in the 3GPP specifications TS 23.228, 24.228, 24.229 and 23.218 has been developed to be conformant to IETF (Internet Engineering Task Force) "Internet Standards". The IP multimedia core network (IM CN) subsystem enables network operators of mobile or cellular networks to offer their subscribers multimedia services based on and built upon Internet applications, services and protocols. The intention is to develop such services by mobile network operators and other 3rd party suppliers including those in the Internet space using the mechanisms provided by the Internet and the IM CN subsystem. The IMS thus enables conversions of, and access to, voice, video, messaging, data and web-based technologies for wireless users, and combines the growth of the Internet with the growth in mobile communications.

Fig. 1 shows an architecture of an IMS network according to the above 3GPP (3rd Generation Partnership Project) specification. The architecture is based on the principle that the service control for home subscribed services for a roaming subscriber is in the home network HN, e.g. a Serving Call State Control Function (S-CSCF) is located in the home network HN. In Fig. 1, an S-CSCF 10 is shown, which currently controls or serves a terminal device or user equipment (UE) 40 according to the subscriber profile or network coverage of the UE 40.

In general, an S-CSCF performs the session control service for the served UEs. It maintains a session state as needed by the network operator for support of the services which may be provided by an application server (AS) 60 which may be located in an external network or in the home network HN or a visited network VN of the UE 40. Within an operator's network, different S-CSCFs may have different functionalities. The functions performed by the S-CSCF during a respective session are e.g. registration, session flow management, charging and resource utiliza-

tion management. When a subscriber roams to the visited network VN, the visited network VN supports a Proxy-CSCF (P-CSCF) 30 which enables the session control to be passed to the respective S-CSCF located at the home network HN and providing the service control. Furthermore, an Interrogating-CSCF (I-CSCF) 50 is
5 provided in the home network HN as a contact point within the operator's network for all connections destined to a subscriber of that network operator, or a roaming subscriber currently located within that network operator's service area. There may be multiple I-CSCFs within an operator's network. The functions performed by the I-CSCF 50 include assigning an S-CSCF to a user performing a registration pro-
10 cedure, routing a request received from another network towards the assigned S-CSCF, maintaining the address of an S-CSCF from a subscriber database, e.g. a Home Subscriber Server (HSS) 20 as shown in Fig. 1, and/or forwarding requests or responses to the S-CSCF determined based on the address of change from the HSS 20.

15 The P-CSCF 30 is the first contact point within the IMS. Its address is discovered by the UE 40 following a PDP (Packet Data Protocol) context activation. The P-CSCF 30 behaves like a proxy, i.e. it accepts requests and services them internally or forwards them on, possibly after translation. The P-CSCF 30 may also behave as a User Agent, i.e. in abnormal conditions it may terminate and independ-
20 ently generate transactions. The functions performed by the P-CSCF 30 are forwarding register requests received from the UE 40 to an I-CSCF, e.g. the I-CSCF 50, determined using the home domain name as provided by the UE 40, and forwarding requests or responses to the UE 40.

Further details regarding the functions of the different CSCF elements shown in
25 Fig. 1 can be gathered from the above mentioned 3GPP-specifications.

It is expected that there will be many types of ASs connected to the IMS system, one example being a Push-To-Talk (PTT) AS. IMS will provide the AS's capabilities that can be used to implement services to the subscribers. These capabilities include e.g. 3rd party registration from IMS towards the AS. In the 3rd party registra-
30 tion, which is specified in the above 3GPP specifications, the registration towards the AS basically is just a notification that the registration in IMS has happened. However, it is not possible for the AS to start de-registration of the subscriber or even a specific Public User Identity allocated to the subscriber. There is no mechanism provided, by which the external AS can ask or request the UE to de-
35 register. The AS can deny the 3rd party registration. If the AS is then classified as

critical, this should lead to the deregistration. Nevertheless, this requires that the registration is passed to the AS. It cannot actively start the deregistration procedure.

Furthermore, in release 6 specifications of 3GPP specification it has been determined that there will be a need in which an AS can de-register or bar a subscriber account, e.g. the AS takes care of controlling a user's prepaid account and when the account becomes empty, the AS should deny/restrict the user's access to the IMS system. As already mentioned, in the current release 5 specifications, there is no procedure in place within the IMS network that allows an AS to force deregistration or barring. For example, a service offered through the IMS by an AS, either residing within the IMS network or within another network, may require disruption or termination of the service for reasons such as delinquency or timely expiration of service.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a method and system, by means of which an AS is enabled to bar and/or de-register a user.

This object is achieved by a method of deactivating a service account associated with an application server of a registered subscriber within a signaling network supporting IP based services, the method comprising the steps of:

- monitoring a status of the service account;
- forwarding a request for de-registration or barring to a registration server, which maintains a registration status of the subscriber, over an interface directly coupling the application server and the registration server upon determining that disruption or termination of service is required; and
- changing the registration status of the subscriber so as to de-register the subscriber at said registration server by changing the registration status in response to the de-registration request or, respectively, changing the barring indication of the subscriber so as to bar the subscriber at said registration by changing the barring indication in response to the barring request.

Additionally, the above object is achieved by a system for deactivating a service account of a registered subscriber within a signaling network supporting IP based services, the system comprising:

- a registration server for maintaining a registration status of the subscriber; and
- an application server, to which said service account is associated, for monitoring a status of the service account and forwarding a request for de-registration or barring to the registration server over an interface directly coupling the application server and the registration server, upon determining that disruption or termination of service is required;
- wherein the registration server is configured to change the registration status of the subscriber so as to de-register in response to the de-registration request or, respectively, to change the barring indication of the subscriber so as to bar the subscriber in response to the barring request.

Accordingly, barring or de-registration can be done via the direct interface between the application server and the registration server. There is thus no need to introduce procedures to the interface between the application server and a call state control functionality of an IP based network. Moreover, the proposed mechanism does not require any action by the UE or terminal device and does not require any new registration package. I.e., when the de-registration occurs, the application server sends the request to the registration server which may then use standardized means for de-registering the concerned user. Even a misbehaving user can thus be de-registered properly. In practice, this de-registration may be done via Sh, Cx and/or Gm reference points.

The registration server may comprise a Home Subscriber Server of an IP Multimedia Subsystem. Then, the request may be forwarded over the Sh reference point. In particular, the request may be forwarded in a profile update request command. On one hand, de-registration may be requested by setting an updated registration status to a predetermined value. On the other hand, barring may be requested by adding a barring indication to a definition of a public identity.

Further advantageous modifications or developments are defined in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the present invention will be described in greater detail based on preferred embodiments with reference to the accompanying drawings, in which:

Fig. 1 shows a schematic block diagram of a network architecture in which the preferred embodiments of the present invention can be implemented;

Fig. 2 shows a message signaling and processing diagram indicating a de-registration procedure according to a first preferred embodiment; and

- 5 Fig. 3 shows a message signaling and processing diagram indicating a barring procedure according to a second preferred embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments will now be described on the basis of an event package subscription in an IMS network architecture as shown in Fig. 1.

- 10 The IMS architecture shown in Fig. 1 refers to a set of core network entities using the services provided by the packet-switched domain to offer multimedia services. The HSS 20 is the master database for a given user and includes the functions of conventional home location registers (HLRs) as well as new functionalities specified to IP networks, such as the IMS. The HSS 20 is the entity containing the sub-
15 scription-related information to support the network entities actually handling calls and/or sessions.

- Possible service configurations could comprise the Presence server assigned to the user, the MRFC (Media Resource Function Control) assigned to the user for conference purposes, other ASs which the user specifically might need to contact,
20 e.g. by means of event subscriptions, specific URIs the user needs to register if the user wants to get the benefit of a specific service, e.g. a PTT or POC service.

- According to the preferred embodiments, a mechanism is provided for deactivating a service account associated with the AS 60 of a registered subscriber within an signaling network supporting IP multimedia services, e.g. the IMS network, where
25 registration status of a subscriber is maintained in a registration server, e.g. the HSS 20, and implementation of the application service is controlled through a call state control server within the IMS network. To achieve this, an account status is monitored within the AS 60, and a deregistration or barring request is forwarded to the HSS 20 over an interface, e.g. the Sh reference
30 point, directly coupling the AS 60 and the HSS 20 upon determining that disruption or termination of service is required. The de-registration or barring request is re-

ceived at the HSS 20, and the de-registration request is implemented by changing the registration status within a subscriber's profile or respectively, the barring request is implemented by changing the value of barring indication within a subscriber's profile. Hence, the AS 60 can request the HSS 20 to bar and/or de-
5 register a user's public identity or identities via the Sh reference point.

Fig. 2 shows a schematic signaling diagram according to the first preferred embodiment where the AS 60 can initiate de-registration of a service account of a user. In case of de-registration, updating of user's registration status can be enabled via Sh reference point and the AS 60 will send a Profile-Update-Request
10 (PUR) Sh Diameter command to the HSS 20 (step 1). The PUR contains User-Data AVP in XML format, which contains the updated registration status, e.g. IMS User State XML tag, with a value "NOT_REGISTERED". This is interpreted by the HSS 20 as a de-registration of the corresponding IMS user. The de-registration
15 covers the whole implicitly registered public identity set to which the public identity included in the PUR command belongs to. When the HSS 20 has successfully updated the registration status of the user (step 2), it acknowledges the updating with command Profile-Update-Answer (PUA) to the AS 60 (step 3). If necessary, the HSS 20 may initiate a de-registration procedure (e.g., RTR command) towards the
20 S-CSCF 10 via the Cx interface.

Fig. 3 shows a schematic signaling diagram according to the second preferred embodiment where the AS 60 can initiate barring of a service account of a user. In case of barring, the updating of barring indication in the HSS 20 can be enabled
25 within the PUR command and an XML tag "BarringIndication" is added to the definition of IMS Public Identity tag (step 1). The "BarringIndication" can use the same definition, which is used in the Cx interface and it can have values "0" (false) and "1" (true). When the AS 60 wants to bar a public identity it sends a PUR command to the HSS 20. The PUR contains the public identities to be barred and their corresponding barring indications. The HSS 20 will update its data according the PUR
30 (step 2) and after successful updating it will acknowledge updating to the AS 60 with a PUA command (step 3). If necessary, the HSS 20 may initiate a profile update procedure (PPR) towards the S-CSCF 10 via the Cx interface.

35 It is noted that the present invention is not restricted to the preferred embodiments

described above. The present invention may be implemented in any data network, where a barring or de-registration procedure can be initiated via an interface between an application server and a subscriber server or database. In particular, the de-registration may be performed via other interfaces, such as for example Gm
5 reference points. The embodiments may thus vary within the scope of the attached claims.

THIS PAGE BLANK (USPTO)

Claims

1. A method of deactivating a service account associated with an application server (60) of a registered subscriber within a signaling network supporting IP based services, the method comprising the steps of:
 - 5 a) monitoring a status of said service account;
 - b) forwarding a request for de-registration or barring to a registration server (20), which maintains a registration status of said subscriber, upon determining that disruption or termination of service is required; and
 - 10 c) changing the registration status of said subscriber so as to de-register said subscriber at said registration server in response to said de-registration request, or, respectively, changing the barring indication of said subscriber so as to bar said subscriber at said registration server by changing the barring indication in response to said barring request.
- 15 2. A method according to claim 1, wherein said forwarding step comprises forwarding said de-registration or barring request over an interface directly coupling said application server (60) and said registration server (20).
- 20 3. A method according to claim 1 or 2, wherein said forwarding step comprises forwarding said request to said registration server comprising a Home Subscriber Server (20) of an IP Multimedia Subsystem.
- 25 4. A method according to claim 3, wherein said forwarding step comprises forwarding said request over said interface comprising an Sh reference point.
5. A method according to claim 3 or 4, wherein said forwarding step comprises forwarding said request in a profile update request command.
- 30 6. A method according to claim 5, further comprising the step of indicating de-registration by setting an updated registration status to a predetermined value.
- 35 7. A method according to claim 5 or 6, further comprising the step of indicating barring by adding a barring indication to a definition of a public identity.

8. A system for deactivating a service account of a registered subscriber within a signaling network supporting IP based services, said system comprising:
- a) a registration server (20) for maintaining a registration status of said subscriber; and
 - 5 b) an application server (60), to which said service account is associated, for monitoring a status of said service account and forwarding a request for de-registration or barring to said registration server, upon determining that disruption or termination of service is required;
 - 10 c) wherein said registration server (20) is configured to change the registration status of said subscriber so as to de-register said subscriber in response to said de-registration request or, respectively, to change the barring indication of said subscriber to bar said subscriber in response to said barring request.
- 15 9. A system according to 8, wherein said registration server is a home subscriber server (20).
10. A system according to 8 or 9, wherein said signaling network comprises an IP Multimedia Subsystem.

Abstract

The present invention relates to a method and system for deactivating a service account associated with an application server (60) of a registered subscriber within a signaling network supporting IP based services. A status of the service account is monitored, and a request for de-registration or barring is forwarded to a registration server (20), which maintains a registration status and barring indication of said subscriber, e.g. over an interface directly coupling the application server and the registration server upon determining that disruption or termination of service is required. The registration status of said subscriber is then changed so as to de-register the subscriber at the registration server in response to said de-registration request or, respectively, the barring indication of said subscriber is then changed so as to bar the subscriber at the registration server by changing the barring indication in response to said barring request. Thereby, the application server is able to actively initiate a de-registration of a subscriber or a specific user identity without requiring any new registration package.

[Fig. 2]

THIS PAGE BLANK (USPTO)

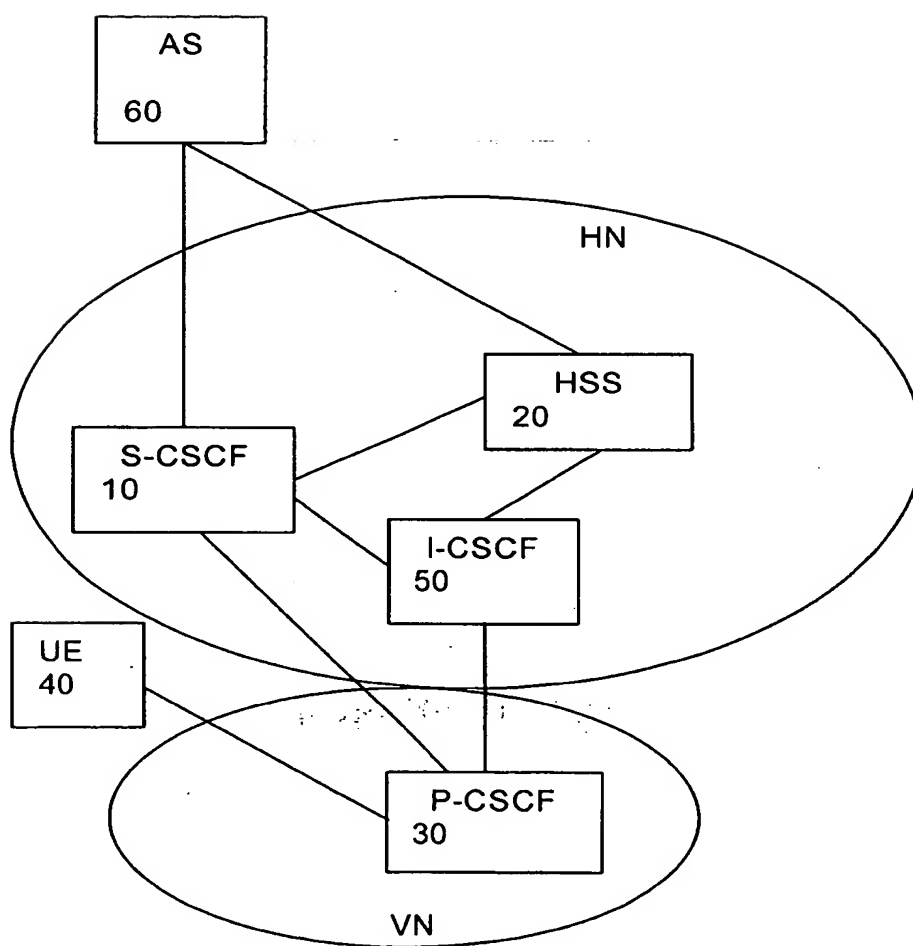
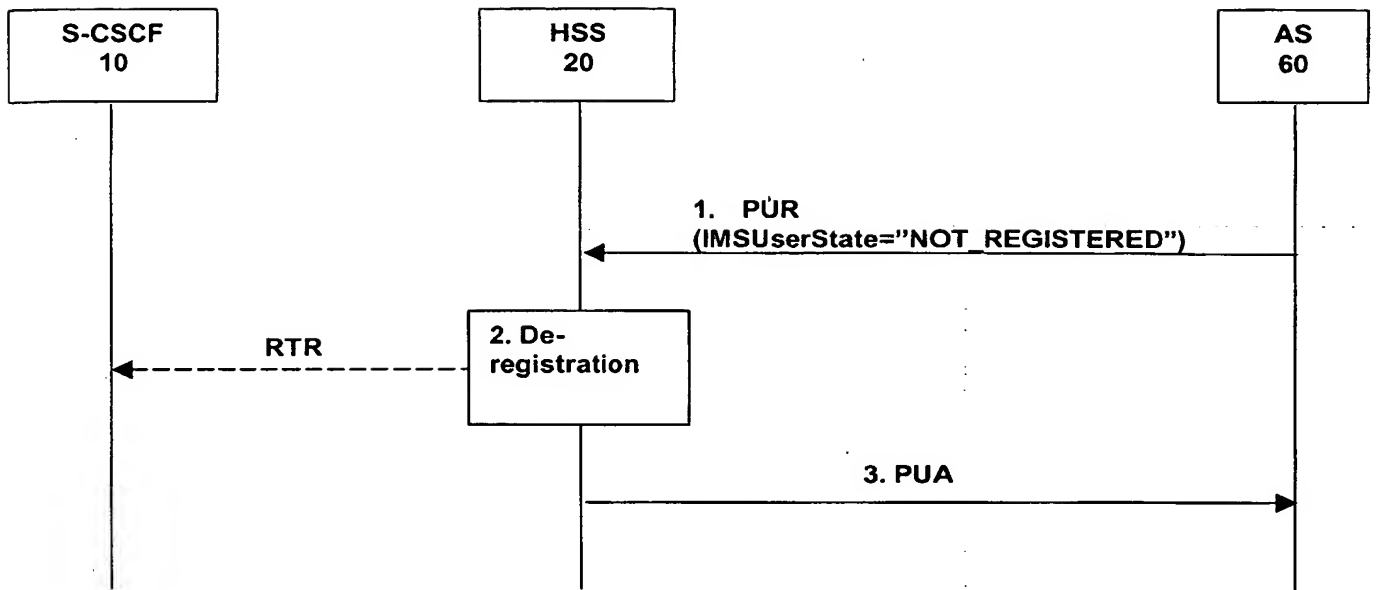
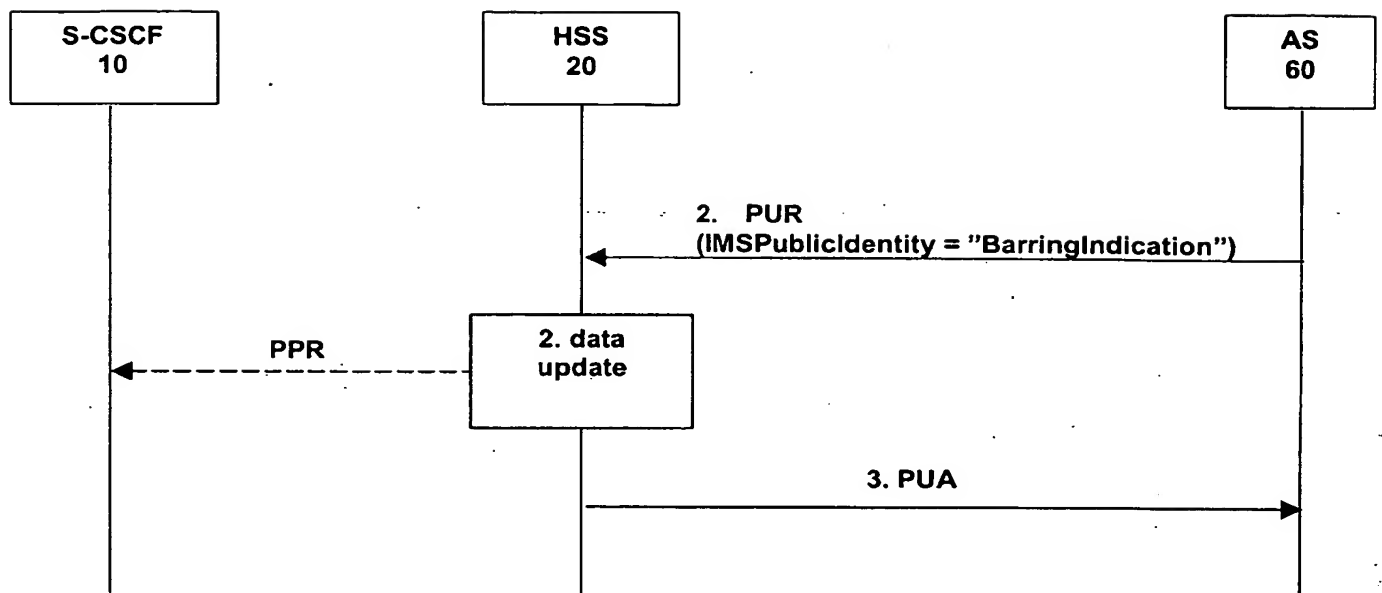


Fig. 1

**Fig. 2**

**Fig. 3**

THIS PAGE BLANK (USPTO)